

PANIC DEVICES



Panic Device Cylinder
164YNO00001



Panic Device Handle
KD040/30-291



KD040/30-280 B

SINGLE LEAF-W*O CYLINDER


TECHNICAL SPECIFICATIONS



KD040/30-280 B

BODY	Aluminium
INSTALLATION	It is suitable for single leaf doors & fire doors
USAGE	It can be used either left or right opening direction doors. It's applicable for doors width 1300*1300 mm. Steel handle bar can be cut according to door width during installation
LOCKING SYSTEM	Kale cylinder with 3 keys from outside (If with cylinder code is KD040/30-280), by Panic Bar inside
OPTIONAL	Lockable outside handle unit with 2 keys

TECHNICAL SPECIFICATIONS

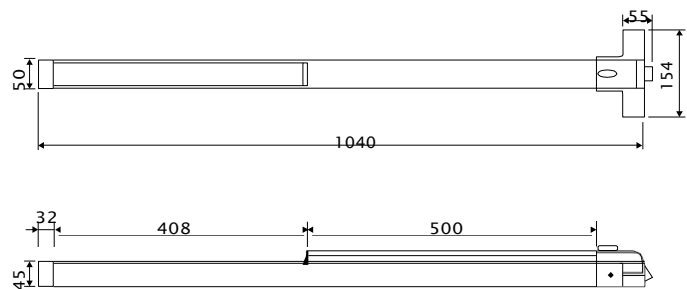

KD040/30-220B

BODY	Painted steel chassis-Half Arm
INSTALLATION	Horizontal installation for single doors
USAGE	Suitable for both left & right-handed doors
LOCKING SYSTEM	Kale cylinder with 3 keys for external opening, touch bar mechanism from inside opening with safety function
CONSTANT FLOW	Dogging mechanism operated by knob
OPTIONAL	From outside by handle with rosette with 2 keys



KD040/30-220B

SINGLE LEAF-W*O CYLINDER